


Absolute maximum ratings





($T_a=25^\circ\text{C}$)

Symbol	Ratings		Unit
	NPN	PNP	
V _{CBO}	60	−60	V
V _{CEO}	60	−60	V
V _{EBO}	6	−6	V
I _C	4	−4	A
I _B	0.5	−0.5	A
P _T	5 (T _a =25°C)		W
	25 (T _C =25°C)		
V _{ISO}	1000 (Between fin and lead pin, AC)		V _{rms}
T _j	150		°C
T _{stg}	−40 to +150		°C
θ _{J-c}	5		°C/W

Equivalent circuit diagram

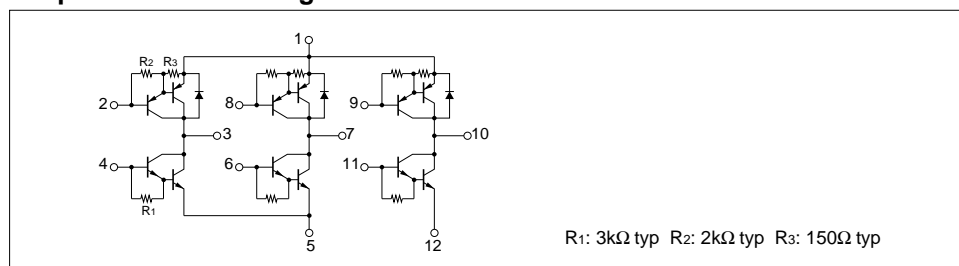

Characteristic curves



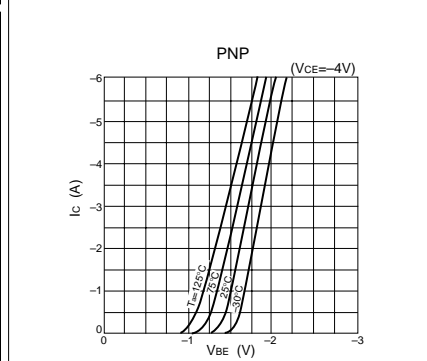
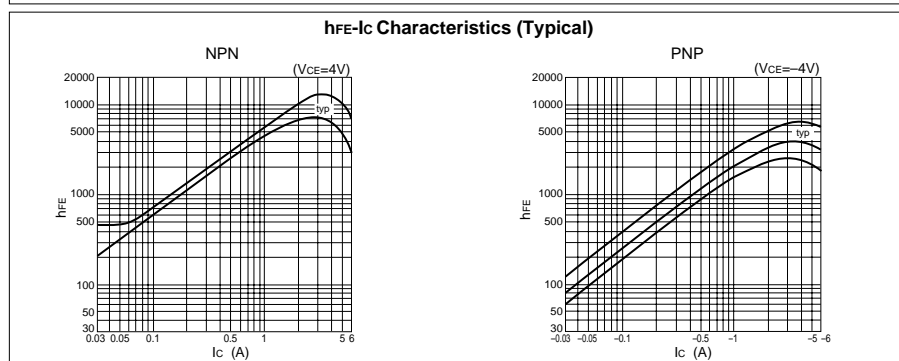
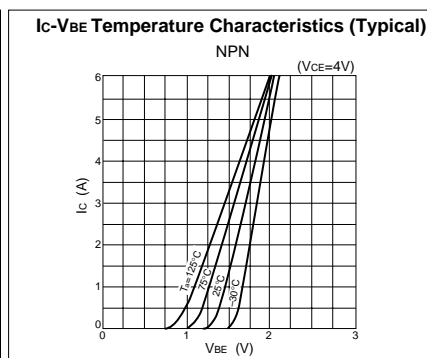
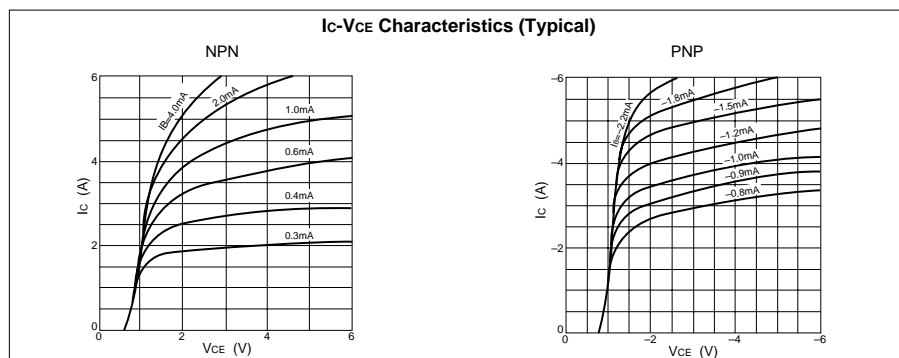


Electrical characteristics



(T_a=25°C)

Symbol	NPN					PNP				
	Specification			Unit	Conditions	Specification			Unit	Conditions
	min	typ	max			min	typ	max		
I _{CBO}			10	μA	V _{CB} =60V			-10	μA	V _{CB} =-60V
I _{EBO}			10	μA	V _{EB} =6V			-10	mA	V _{EB} =-6V
V _{CEO}	60			V	I _C =10mA	-60			V	I _C =-10mA
h _{FE}	2000				V _{CE} =4V, I _C =3A	2000				V _{CE} =-4V, I _C =-3A
V _{CE(sat)}			1.5	V	I _C =3A, I _B =6mA			-1.5	V	I _C =-3A, I _B =-6mA

Characteristic curves

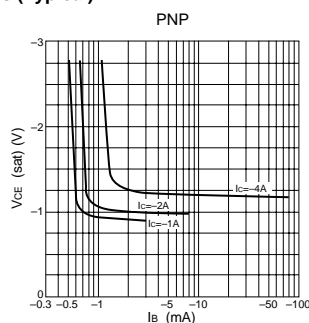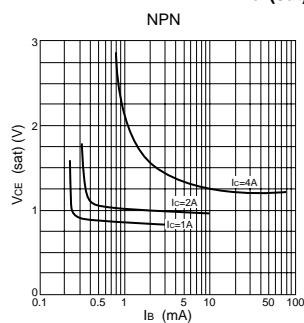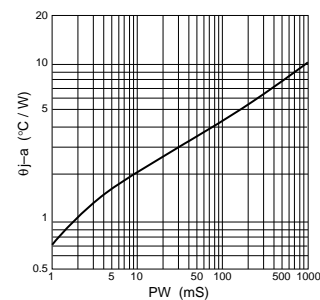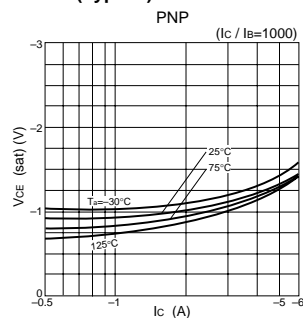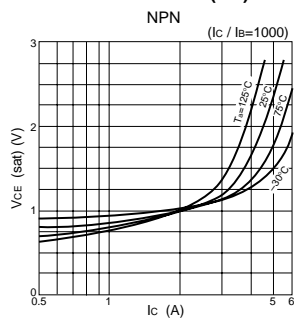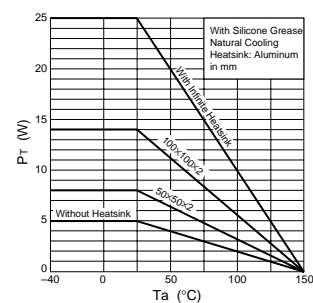V_{CE(sat)}-I_B Characteristics (Typical)θ_{JA}-PW CharacteristicsV_{CE(sat)}-I_C Temperature Characteristics (Typical)P_T-T_a Characteristics

Safe Operating Area (SOA)

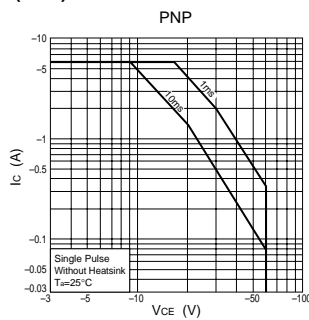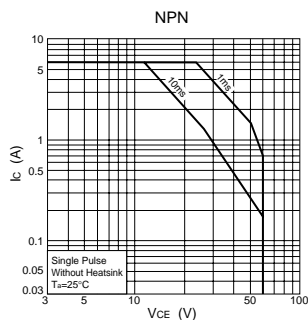

1000 万+元器件 PDF 数据手册在线免费下载: <https://pdf.ttic.cc>

Electronic Component Datasheets Free Download: <https://pdf.ttic.cc>

国内知名度极高的电子元器件行业 B2B 供求平台（1 亿+库存信息，30 万+日访问量，终端工程师及工厂首选平台）: <https://www.ttic.cc>

Highly renowned B2B supply and demand platform for electronic components industry (More than 100,000,000 inventory information, More than 300,000 visits per daily , preferred platform for terminal engineers and factories):
<https://www.ttic.cc>

全球供应商库存及价格信息: <http://price.hqbdsj.com>

Electronic Component's Price & Stock: <http://price.hqbdsj.com>